


PRODUCT





DESCRIPTION

- 3D Adjustment : height adjustment ±2mm side adjustment+3mm,-2mm depth adjustment±3mm
- Door rotates to open and slides into cabinet sides
- Gentle and smooth door opening and closing
- Door thickness: 16~30mm
- Two sets of slides:
Door height up to:2000mm,door weight up to 25kg
- Three sets of slides:
Door height:1600~2700mm,door weight up to 30kg

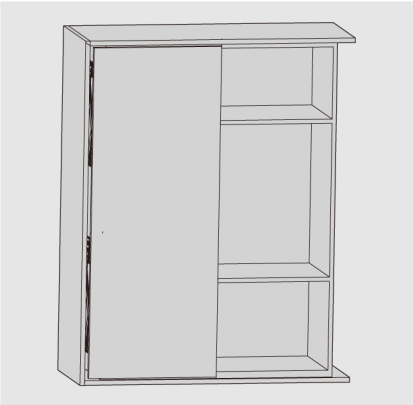





PLANNING

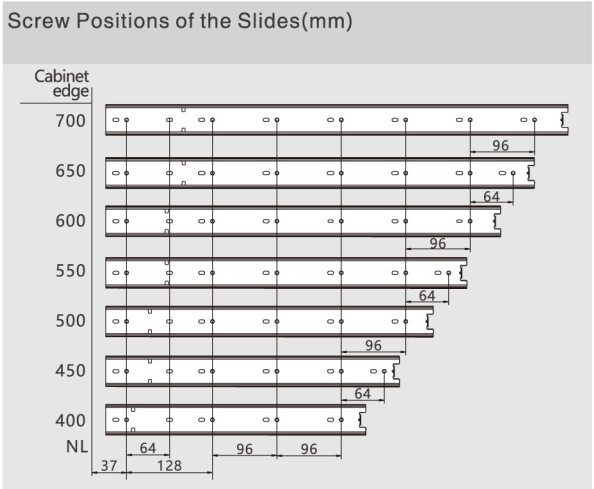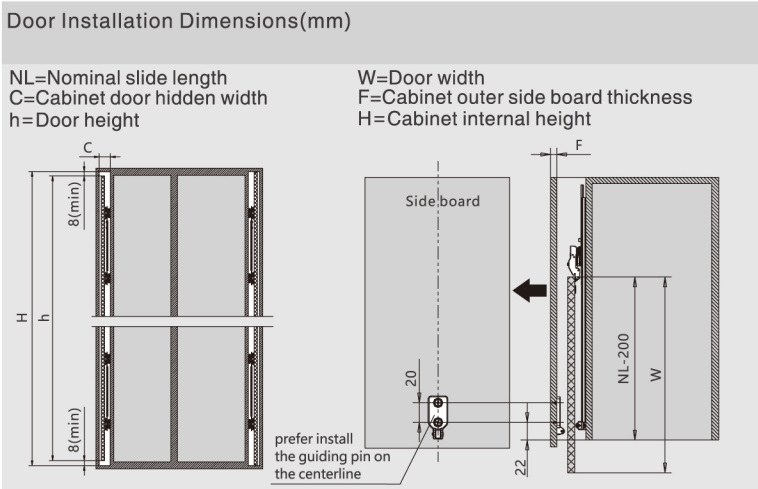

R01 SERIES POCKET-SLIDING DOOR SYSTEM, FOR WOOD DOOR

Kit Package			
	NL (mm)	Two Sets of Slides Item No.	Set/ctn
	400	R014002H	5
	450	R014502H	5
	500	R015002H	5
	550	R015502H	5
	600	R016002H	5
	650	R016502H	5
	700	R017002H	5




Kit Package			
	NL (mm)	Three Sets of Slides Item No.	Set/ctn
	400	R014003H	3
	450	R014503H	3
	500	R015003H	3
	550	R015503H	3
	600	R016003H	3
	650	R016503H	3
	700	R017003H	3

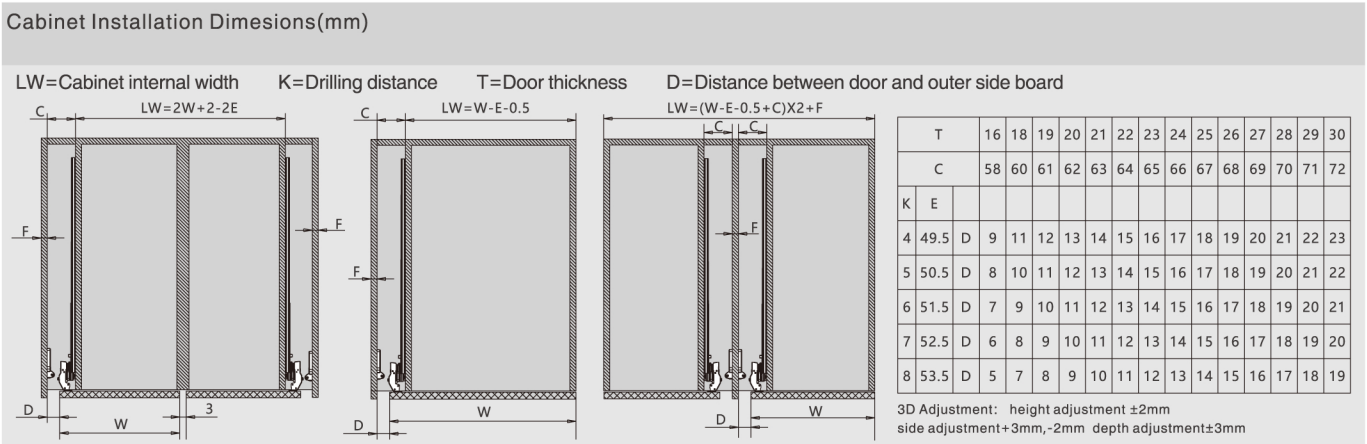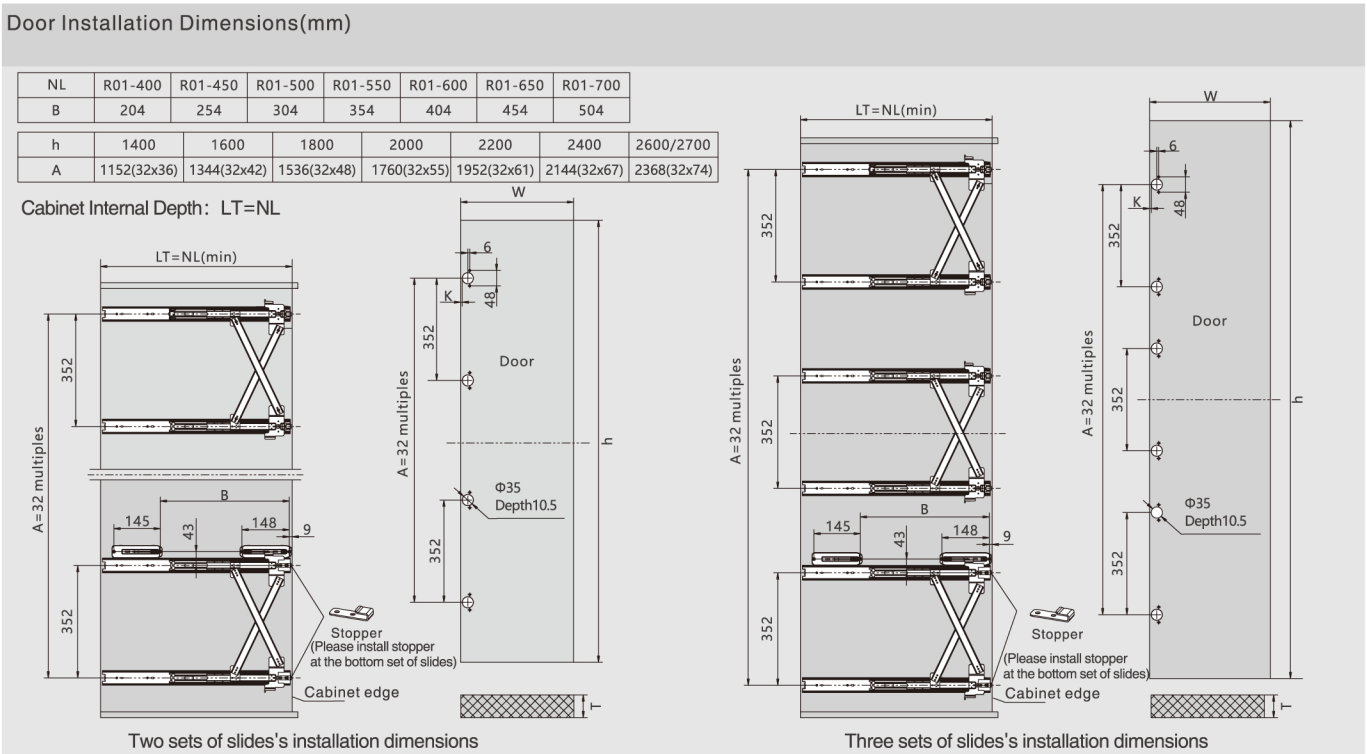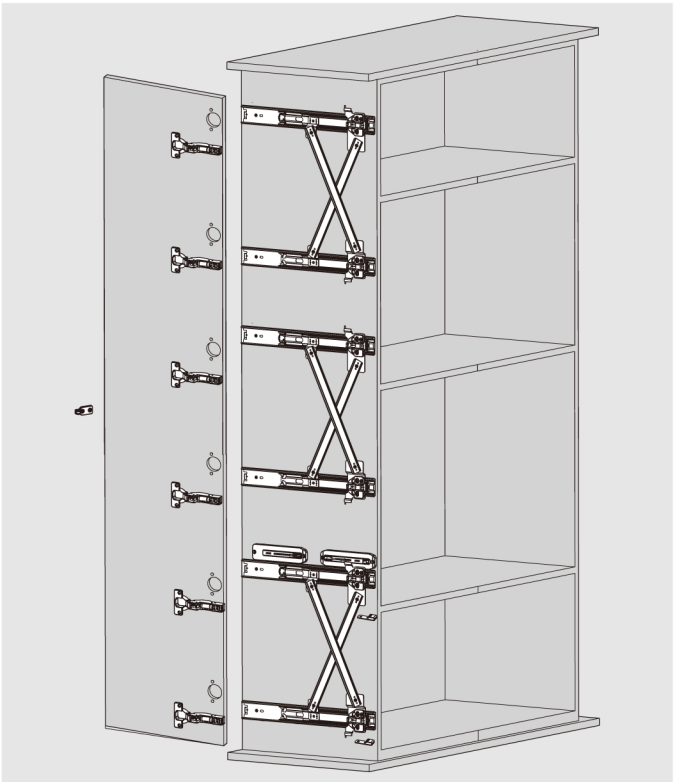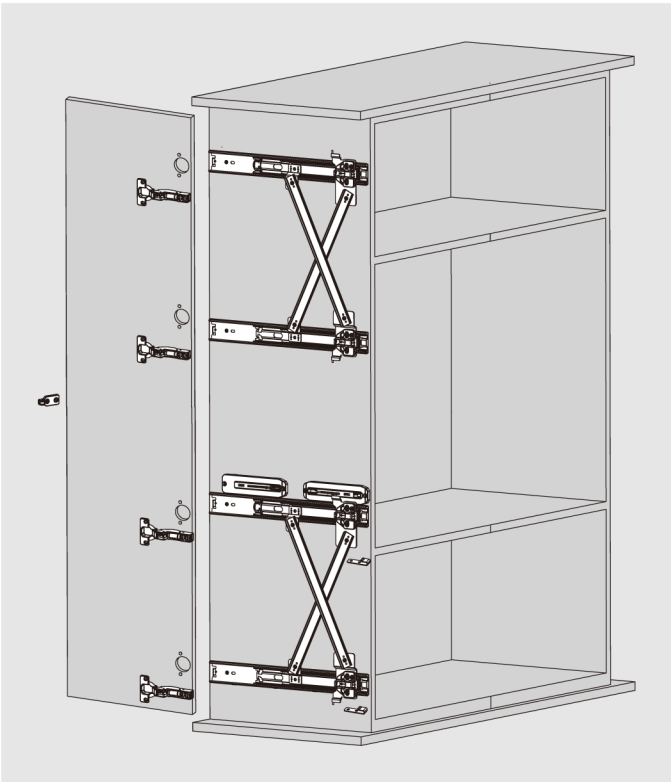

ASSEMBLY AND ADJUSTMENT

Assembly and Adjustment(for R01 Series Pocket-sliding Door System)

Assembly

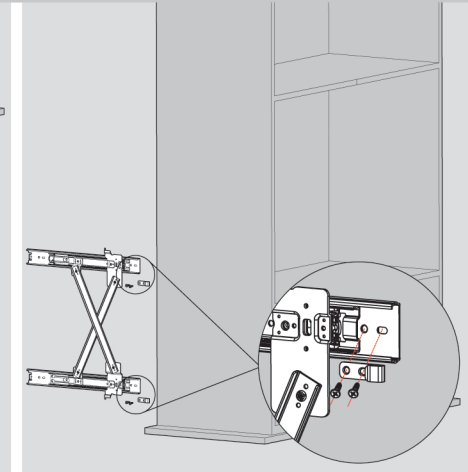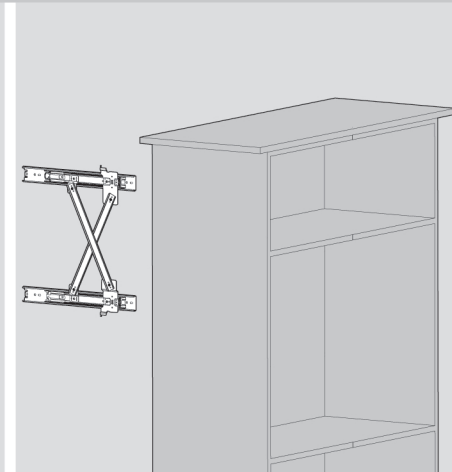
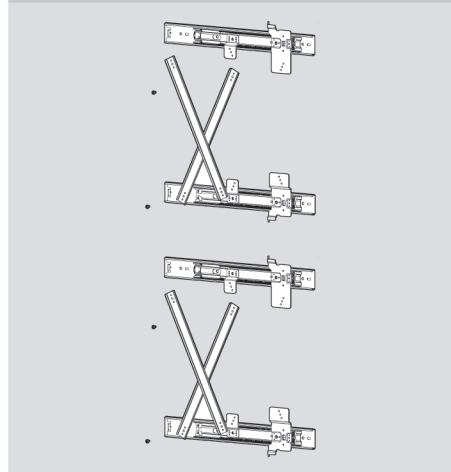


Install cross bars

Install the slide on the inner side board


Install stopper(please install the stopper at the bottom set of slides)

Assembly

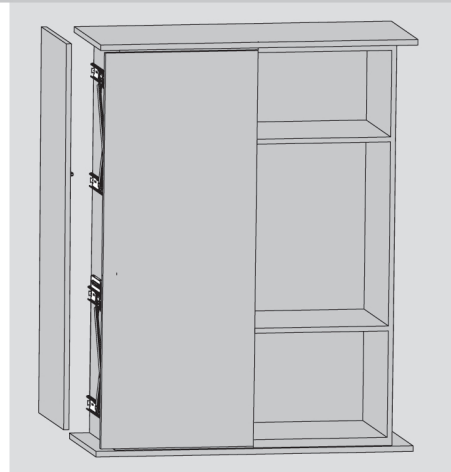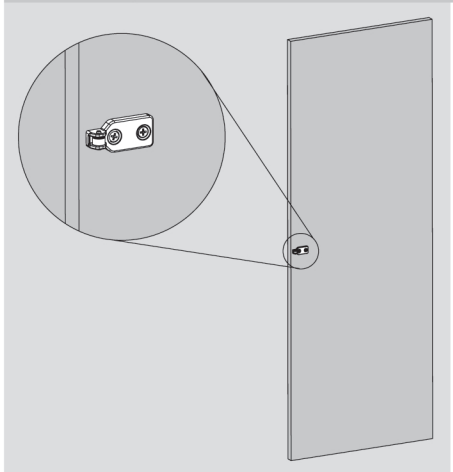




Install the guiding pin on the outer side board

Mount the outer side board

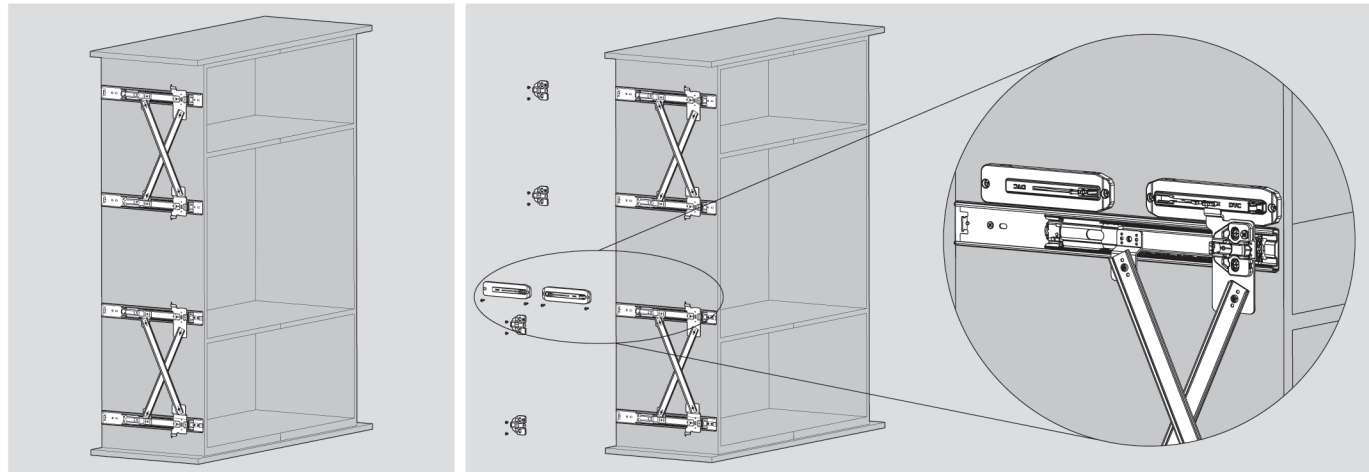

Mounting plates and slide accessories assembly

Adjustment

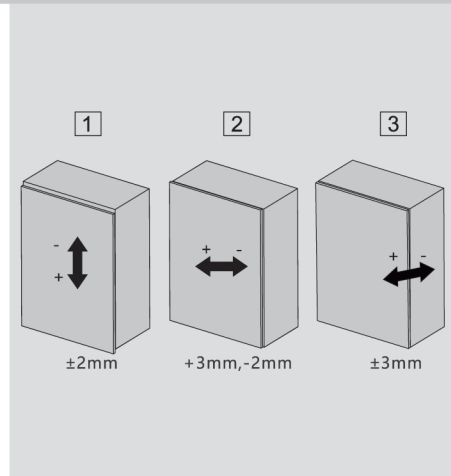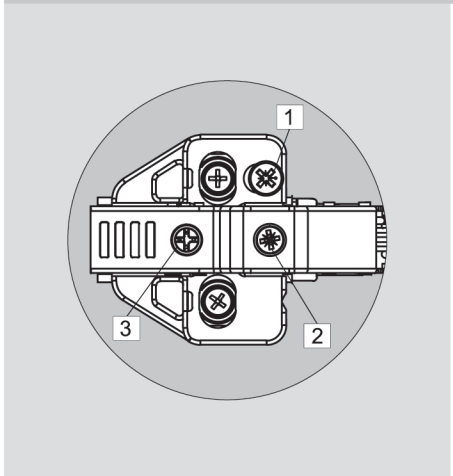

1



2

3

±2mm




+3mm,-2mm

±3mm

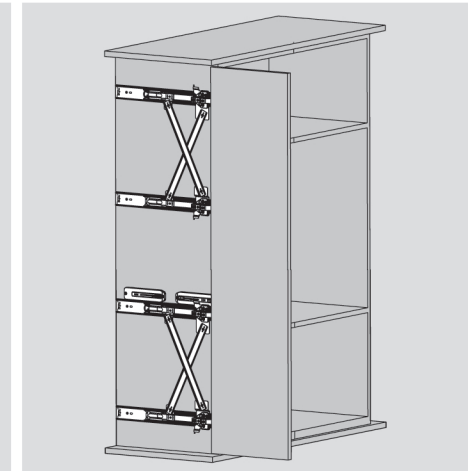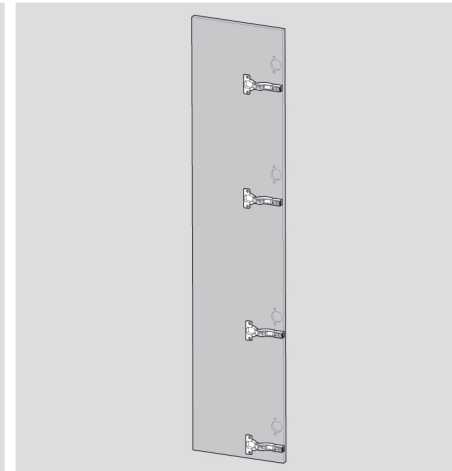

Hinges installation

Door assembly

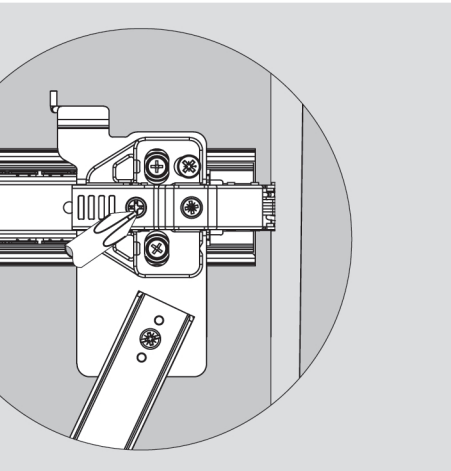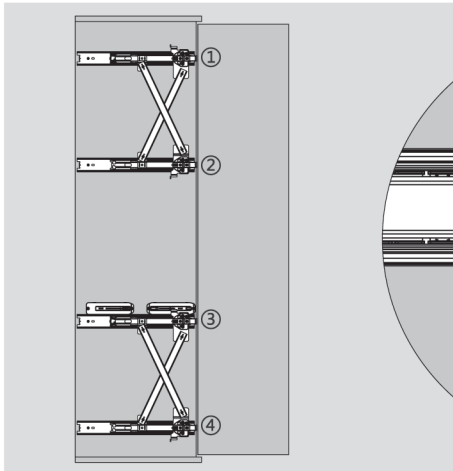

Adjust the screw No.1 to make the door move inside

Adjust the screw No.2 to make the door move outside